

Disassembly Tool Program 0813

Order No.:

08-V015-0493

The tool set consists of the following two tools:



Fig. 1: Tool 1 (Order No.: 08-W100-0599-001)



Fig. 2: Tool 2 (Order No.: 08-W100-0599-002)

Working steps:

1. Slide tool 1 (Order No.: 08-W100-0599-001) between conductor rail and hanger clamp until stop (see Fig. 3 and Fig. 4).

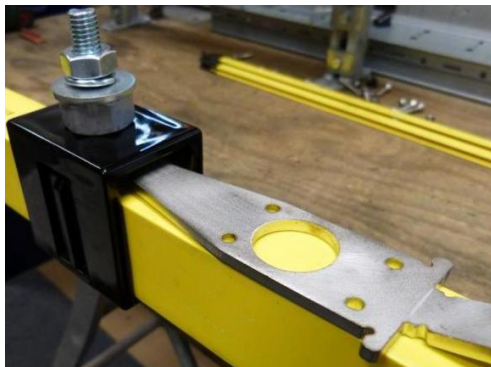


Fig. 3



Fig. 4

Installation Instructions

Disassembly Tool Program 0813

2. Push the conductor rail against the tool or rather against the hanger clamp (see Fig. 5).

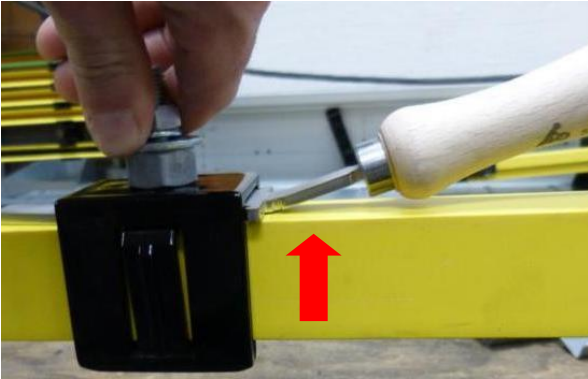


Fig. 5

3. Insert tool 2 (Order No.: 08-W100-0599-002) into the open side of the conductor rail (see Fig. 6 - Fig. 8).

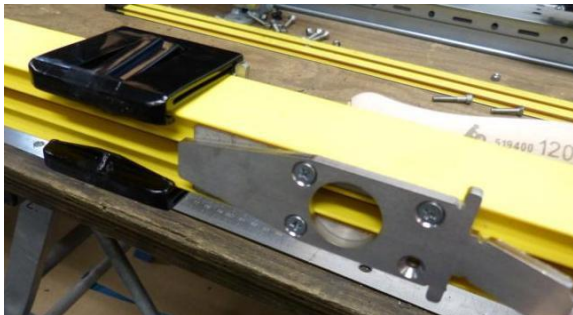


Fig. 6



Fig. 7



Fig. 8

Installation Instructions

Disassembly Tool Program 0813

4. The conductor rail can be removed (see Fig. 9).

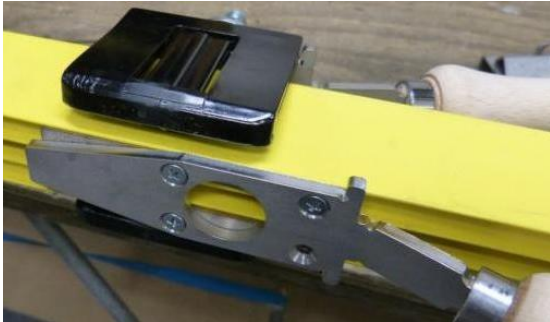


Fig. 9

5. Remove tool 2 (Order No.: 08-W100-0599-002) (see Fig. 10).



Fig. 10

6. To remove tool 1 (Order No.: 08-W100-0599-001), a tension spring may need to be pushed away (see red arrow) (see Fig. 11).



Fig. 11

Conductix-Wampfler GmbH
Rheinstrasse 27 + 33
79576 Weil am Rhein - Maerkt
Germany

Phone: +49 (0) 7621 662-0
Fax: +49 (0) 7621 662-144
info.de@conductix.com
www.conductix.com